

MANIFOLD GAUGE SET SET ON

AC0CA-05

1. REMOVE LUGGAGE COMPARTMENT TRIM BOX COVER
2. CONNECT CHARGE HOSE TO MANIFOLD GAUGE SET

Tighten the nuts by hand.


CAUTION:

Do not connect the wrong hoses.

3. CONNECT QUICK DISCONNECT ADAPTER TO CHARGING HOSES

Tighten the nuts by hand.

4. CLOSE BOTH HAND VALVES OF MANIFOLD GAUGE SET
5. REMOVE CAPS FROM SERVICE VALVE ON REFRIGERANT LINE

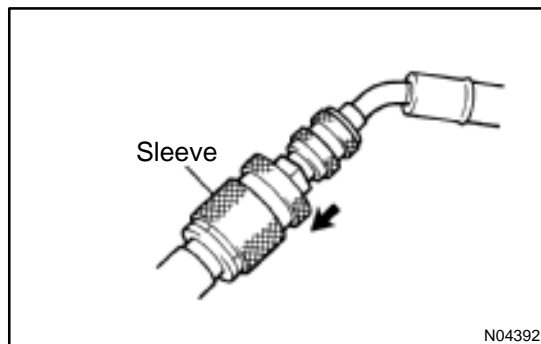

6. CONNECT QUICK DISCONNECT ADAPTER TO SERVICE VALVES

HINT:

Push the quick disconnect adapter onto the service valve, then slide the sleeve of the quick disconnect adapter downward to lock it.