


DTC	P0120	Throttle/Pedal Position Sensor/Switch "A" Circuit Malfunction
------------	--------------	--

CIRCUIT DESCRIPTION

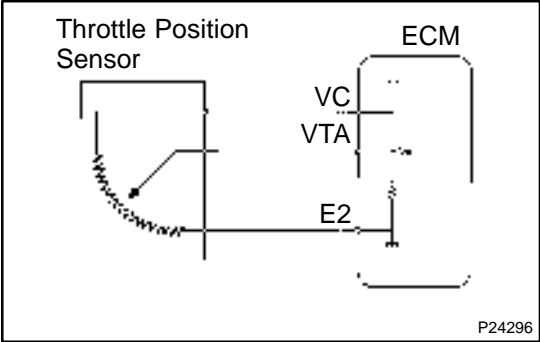

The throttle position sensor is mounted in the throttle body and detects the throttle valve opening angle. When the throttle valve is fully closed, a voltage of approximately 0.3 – 0.8 V is applied to terminal VTA of the ECM. The voltage applied to the terminals VTA of the ECM increases in proportion to the opening angle of the throttle valve and becomes approximately 3.2 – 4.9 V when the throttle valve is fully opened. The ECM judges the vehicle driving conditions from this signal input from terminal VTA, and uses it as one of the conditions to decide the air–fuel ratio correction, power increase correction and fuel–cut control etc.


DTC No.	DTC Detection Condition	Trouble Area
P0120	Condition (a) or (b) continues with more than 5 sec.: (a) VTA < 0.1 V (b) VTA > 4.9 V	<ul style="list-style-type: none"> • Open or short in throttle position sensor circuit • Throttle position sensor • ECM

HINT:

After confirming DTC P0120, use the OBD II scan tool or TOYOTA hand–held tester to confirm the throttle valve opening percentage.

Throttle valve opening position expressed as percentage		Trouble Area
Throttle valve fully closed	Throttle valve fully open	
0 %	0 %	VC circuit open VTA circuit open or short
Approx. 100 %	Approx. 100 %	E2 circuit open

WIRING DIAGRAM

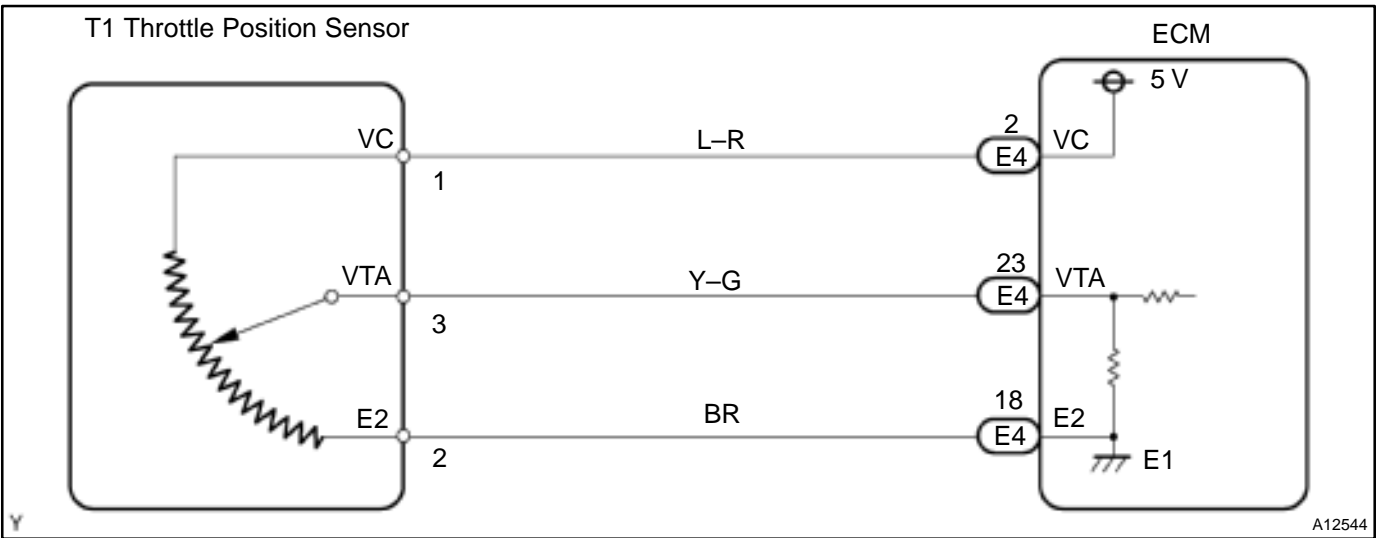


INSPECTION PROCEDURE

HINT:

- If DTCs P0100, P0106, P0110, P0115 and P0120 are output simultaneously, E2 (sensor ground) may be open.
- Read freeze frame data using TOYOTA hand-held tester or OBD II scan tool. Because freeze frame records the engine conditions when the malfunction is detected. When troubleshooting, it is useful for determining whether the vehicle was running or stopped, the engine was warmed up or not, the air-fuel ratio was lean or rich, etc. at the time of the malfunction.

- 1 Connect OBD II scan tool or TOYOTA hand-held tester, read throttle valve opening percentage.**

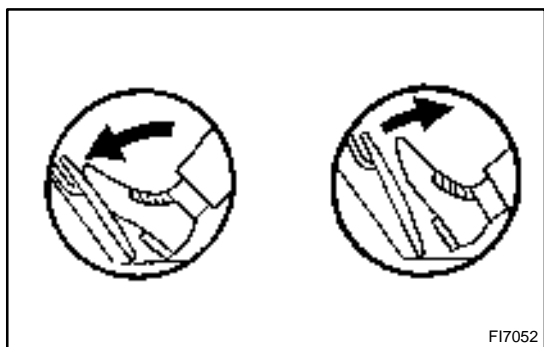

PREPARATION:

- Connect the OBD II scan tool or TOYOTA hand-held tester to the DLC3.
- Turn the ignition switch ON and push the OBD II scan tool or TOYOTA hand-held tester main switch ON.

CHECK:

Read the throttle valve opening percentage.

OK:


Throttle valve	Throttle valve opening position expressed as percentage
Fully open	Approx. 70 %
Fully closed	Approx. 10 %

OK

Check for intermittent problems
(See page [DI-3](#)).

NG

- 2 Check voltage between terminal 1 of throttle position sensor connector and body ground.**

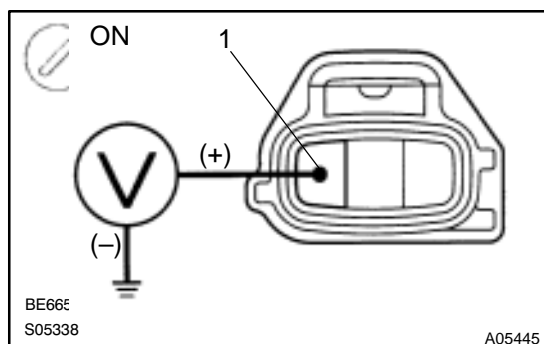

PREPARATION:

- Disconnect the throttle position sensor connector.
- Turn the ignition switch ON.

CHECK:

Measure the voltage between terminal 1 of the throttle position sensor connector and body ground.

OK:

Voltage: 4.5 – 5.5 V

NG

Go to step 5.


OK

3 Check throttle position sensor (See page [SF-33](#)).

NG Replace throttle position sensor.

OK

4 Check voltage between terminals VTA and E2 of ECM connector.

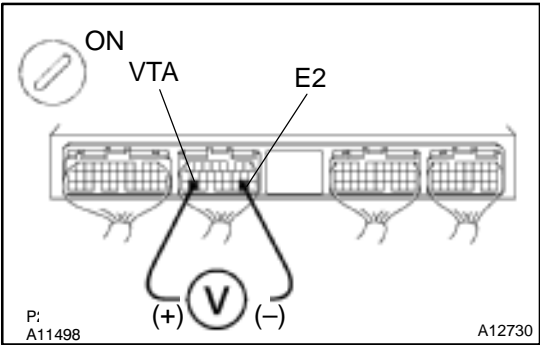

PREPARATION:

- (a) Disconnect the ECM with connector from body panel (See page [SF-62](#)).
- (b) Turn the ignition switch ON.

CHECK:

Measure the voltage between terminals VTA and E2 of the ECM connector.

OK:


Throttle valve	Voltage
Fully closed	0.3 – 1.0 V
Fully open	3.2 – 4.9 V

OK Check and replace ECM (See page [IN-28](#)).

NG

Check for open and short in harness and connector in VTA or E2 circuit between ECM and throttle position sensor (See page [IN-28](#)).

5 Check voltage between terminals VC and E2 of ECM connector.

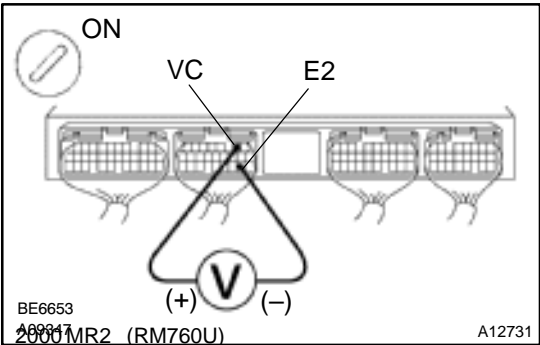

PREPARATION:

- (a) Disconnect the ECM with connector from body panel (See page [SF-62](#)).
- (b) Turn the ignition switch ON.

CHECK:

Measure the voltage between terminals VC and E2 of the ECM connector.

OK:**Voltage: 4.5 – 5.5 V****NG****Check and replace ECM (See page [IN-28](#)).****OK****Check for open in harness and connector in VC circuit between ECM and sensor (See page [IN-28](#)).**